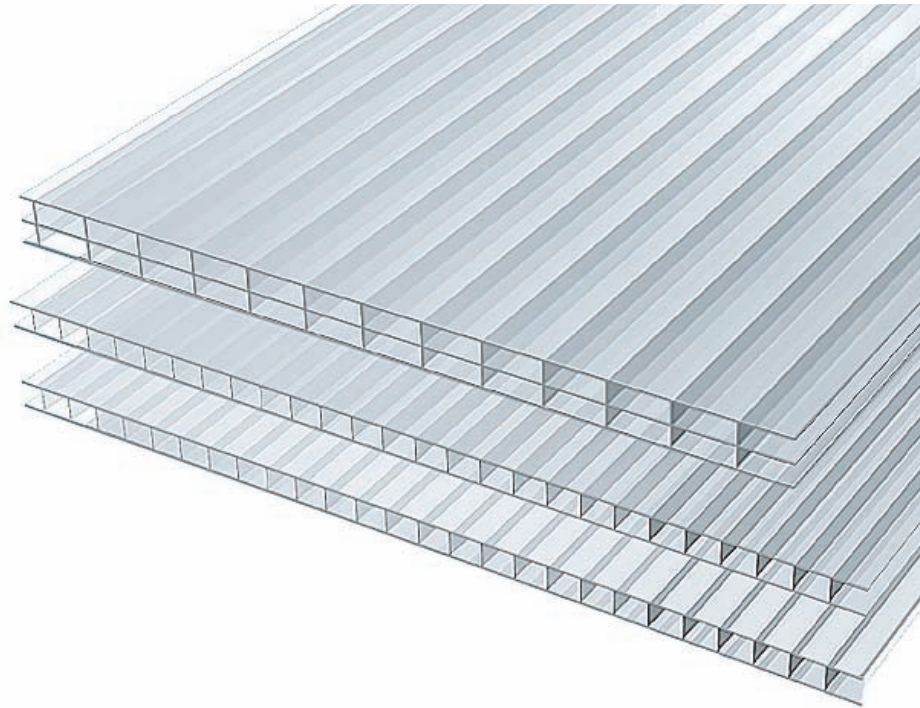

NOVALUX

Polycarbonate & Multi-wall sheets



POLYCARBONATE & MULTI-WALL SHEETS

CLEAR COL. 1015



Thickness	6 mm	8 mm	10 mm	16 mm
LT	76%	74%	73%	69%
K value	3,5 W/m ² °K	3,2 W/m ² °K	3,0 W/m ² °K	2,2 W/m ² °K

OPAL COL. 1035

Thickness	6 mm	8 mm	10 mm	16 mm
LT	49%	47%	45%	41%
K value	3,5 W/m ² °K	3,2 W/m ² °K	3,0 W/m ² °K	2,2 W/m ² °K

NOVALUX sheets are suitable for several applications, **industrial buildings, conservatories, warehouses, partition walls, windows and do it yourself**

NOVALUX are affordable, economic and with a high light transmission

Section	Thickness	Rib distance	N° of walls	Weight Kg/m ²	Width
	16 mm*	19 mm	3	2,60	2100 mm
	10 mm	10 mm	2	1,50	2100 mm
	8 mm*	10 mm	2	1,40	2100 mm
	6 mm	6 mm	2	1,20	2100 mm

*Minimum quantity required: ask to our offices

Please take note that the LT and colour delta, compare to the reference samples can be. (colour ΔL +/- 3 ; a* +/- 2 ; b* +/- 2 ; LT +/- 5%) end are bigger then standard sheets.



Polimeri tecnici S.A.
 via Lische, 5 - Z.I. 3 - 6855 STABIO - SWITZERLAND
 phone +41-91-6417140 - fax +41-91-6417149
www.politecsa.com
info@politecsa.com

All the data reported in this literature can be changed by POLITEC SA at any time without obligation of notice. These data are the result of our best knowledge but they are a non-binding information and do not release Client to make own tests in order to check whether the products are suitable with the use they are planned for. The products having a weight lower than the standard reported here in are not covered by any guarantee.